

Grommes~Precision Precision Electronics





The PR Series

3 Input Channel Mixer Amplifier: From 15 to 60 Watts of Continuous RMS Power PR15B • PR31B • PR60B

The versatile **PR Series** combines the flexibility of the popular **Grommes~Precision** MICRO mixer amplifier series with a digital tuner. Thus, becoming an all-in-one solution to a common audio application: providing background music (whether from the on-board tuner or auxiliary) with paging via microphone and/or telephone.


The **PR Series** features a liquid crystal display with 10 AM and 10 FM preset station memory and auto station search selector. In addition, it features 3 input flexible channels (1 mic, 3 aux, Tuner, 1 600 ohm/Tel-Page) which are capable of pumping 15, 30, and 60 watts of continuous RMS power into 4 ohm, 25V, or 70.7V speakers with low distortion, wide frequency response, and full range bass and treble controls. Plus, the **PR Series** automatically mutes the aux or tuner channel when the page or mic channel is activated.

Designed for bulletproof operation, the **PR Series** is packed with safeguards to ensure long-life, including a built-in circuit breaker and thermal and current limiting. With over a half-century of experience in the industry, **Grommes~Precision** backs the **PR Series** with its unbeatable expertise and Precision Assurance Pledge: a **5** year warranty and a **30** day money back guarantee.

FEATURES

- 15, 30, or 60 Watts of Continuous RMS Power
- Large Digital Display
- 10 AM / 10FM Station Memory Presets.
- Auto Station Search
- Built-in Antenna & Provision for External Antenna
- Slim 2U design
- Rack Mountable with RP-2U Kit
- 5 Year Warranty & 30 Day Money Back Guarantee.

	PR Series
POWER OUTPUT RMS	15W / 30W / 60W
DISTORTION @RPO	<u><</u> 0.3%
OUTPUTS	4-8 ohm / 25V & 70.7V / BOOSTER
FREQUENCY RESPONSE DIRECT	+/-1dB 20-20kHz
LINE	+/-1dB 50-15kHZ
INPUTS	1-MIC;3-AUX; 600 ohm/TEL-PAGE
TONE	BASS AND TREBLE
MICROPHONE	SCREW TERMINALS
DIMENSIONS	16.5"Wx3.5"Hx11.25"D
WEIGHT	13LBS / 14LBS / 19LBS

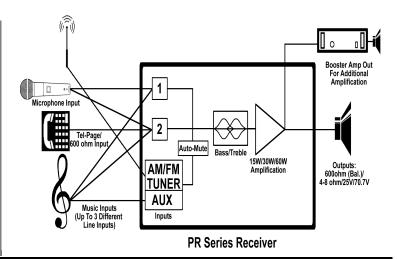








Grommes~Precision

847-599-1799 · 800-SINCE-46 · FAX: 847-599-6178 1331 Estes Ave. · Gurnee, IL 60031 · USA www.grommesprecision.com



Grommes~Precision Precision Electronics

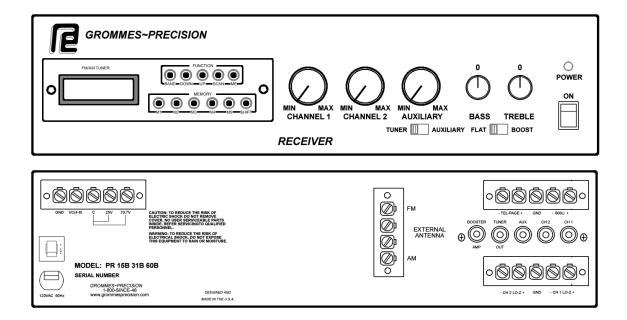

PR15B, 31B & PR30B







Grommes~Precision

847-599-1799 · 800-SINCE-46 · FAX: 847-599-6178 1331 Estes Ave. · Gurnee, IL 60031 · USA www.grommesprecision.com